



PREL-SECUR

Bullet-Resistant Glazing Glass-Clad Polycarbonate

DESCRIPTION

Prel-Secur glass reinforced with polycarbonate glazing provides penetration resistance superior to all-glass alternatives of the same thickness.

It can be made with one or more lites of polycarbonate to ensure maximum resistance to penetration and impact from various-calibre bullets.

Prel-Secur glazing combines the ballistic resistance of polycarbonate with the abrasion and chemical resistance of glass, making it superior to all other transparent armoured panels.

Prel-Secur is 40% lighter than all glass laminated glazing, an important design, installation and cost factor.

Prel-Secur use heat-strengthened glass to ensure superior impact and thermal shock resistance.

SECTIONS OF PREL-SECUR GLAZING UNITS


Prelco offers two (2) types of glass-clad polycarbonate bullet-resistant glazing

PREL-SECUR "NS": NO SPALL

Prel-Secur NS laminate has glass plies only on the exterior or threatened side. The interior surface is composed of polycarbonate that can be given an optional abrasion-resistant hard coating, affording protection against spalling glass.

PREL-SECUR "LS": LOW SPALL

Prel-Secur LS laminate has glass plies on both sides. The interior surface is covered with a thin sheet of glass for easy maintenance. Under attack, there is minimum spalling inside. Contact us for more information about this product.

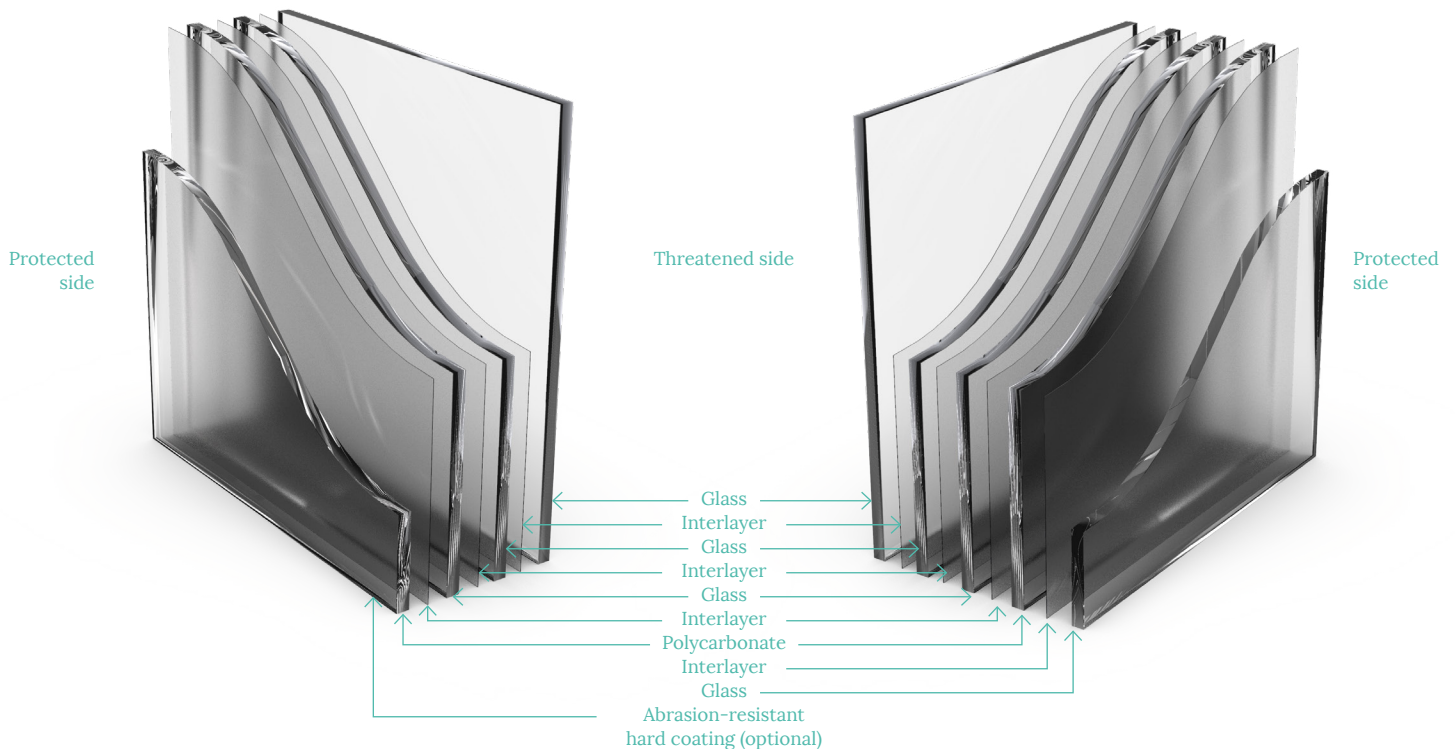

SPECIFICATIONS

PREL-SECUR – GLASS AND POLYCARBONATE							
Product	UL 752 Level ¹	Weapon	Nominal Thickness	Weight lbs/sq ft (kg/m ²)	Maximum size ²	Tolerance	
						Dimensional	Thickness
PS750P-NS	1	9 mm	⅝" (17 mm)	7.15 (34.91)	60" x 96" (1524 x 2438 mm)	±⅜" (±5 mm)	±⅜" (±1.6 mm)
PS938P-NS	2	.357 Magnum	⅝" (24 mm)	10.15 (49.56)	60" x 96" (1524 x 2438 mm)	±⅜" (±5 mm)	±⅜" (±2.4 mm)
PS1188P-NS	3	.44 Magnum	1" (25 mm)	10.70 (52.24)	60" x 96" (1524 x 2438 mm)	±⅜" (±5 mm)	±⅜" (±2.4 mm)
PS1250P-NS	4	.30.06	1¼" (32 mm)	13.60 (66.40)	60" x 96" (1524 x 2438 mm)	±⅜" (±5 mm)	±⅜" (±2.4 mm)
PS1500P-NS	5	7.62 mm	1½" (38 mm)	16.70 (81.54)	60" x 96" (1524 x 2438 mm)	±⅜" (±5 mm)	±⅜" (±2.4 mm)
PS900P-NS	6	9 mm	⅞" (23 mm)	9.40 (45.89)	60" x 96" (1524 x 2438 mm)	±⅜" (±5 mm)	±⅜" (±2.4 mm)
PS2000P-NS	7	5.56 mm	2" (51 mm)	24.00 (117.18)	60" x 96" (1524 x 2438 mm)	±⅜" (±5 mm)	±⅜" (±2.4 mm)
PS2060P-NS	8	7.62 mm	2⅛" (52 mm)	24.00 (117.18)	60" x 96" (1524 x 2438 mm)	±⅜" (±5 mm)	±⅜" (±2.4 mm)
PS2250P-NS	9	30-06 M2 AP	2¼" (57 mm)	26.40 (128.90)	60" x 96" (1524 x 2438 mm)	±⅜" (±5 mm)	±⅜" (±2.4 mm)

¹ Tested to the UL 752 Ballistic Rating

² Panel weight should not exceed 700 lbs (318 kg)

**PREL-SECUR NS –
GLASS-CLAD
POLYCARBONATE**
bullet-resistant glazing
complies with the
ballistics requirements
specified by
UL 752



PRELCO INC.

94, boulevard Cartier
Rivière-du-Loup (Québec)
G5R 2M9

T. 418 862-2274
Toll free. 1 800 463-1325
sales@prelco.ca
prelco.ca

The information contained herein is, to the best of our knowledge and belief, correct. This information is intended for reference purposes only. In no event will Prelco Inc. be responsible for faulty usage of this product. The information contained herein may change as new developments occur and further experience is gained.